

# Technical Specifications

# TELEHOOK<sup>TM</sup>

## Universal Projector Flush Mount

### Dimensions

- NOTE:**
- This product has been designed to suit 90% of projectors
  - Maximum load = 15kg (33lbs)
  - Mounting hardware included


- NOTE:** 4 sets of Extension Bracket lengths are included to suit most mounting configurations. Any combination of these brackets may be used.




2x50mm (2")




2x100mm (4")



2x75mm (3")



2x150mm (5<sup>7</sup>/<sub>8</sub>")



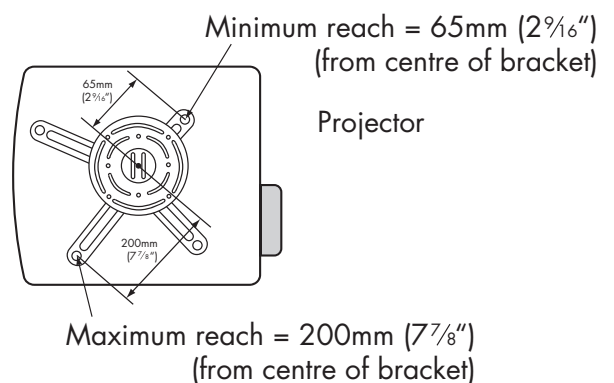


#### Projector mounting screws and washers included:

- M2.5x15 (x4)
- M3x15 / M3x20 (x4 each)
- M4x15 / M4x20 / M4x25 / M4x30 - (x4 each)
- M5x15 / M5x20 / M5x25 / M5x30 - (x4 each)
- M6x15 / M6x20 / M6x25 / M6x30 - (x4 each)
- Washer 10mm / 8mm Washer (x4 each)

#### Mounting hardware included:

- Nylon Anchor Plug (x4)
- 14 Gauge Coach Screw (x4)
- Washer 20mm (x4)

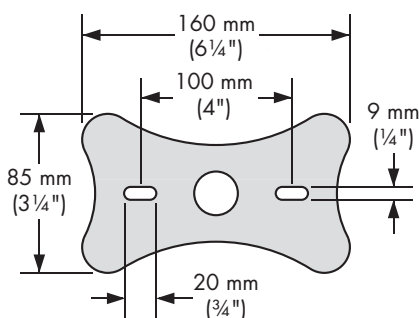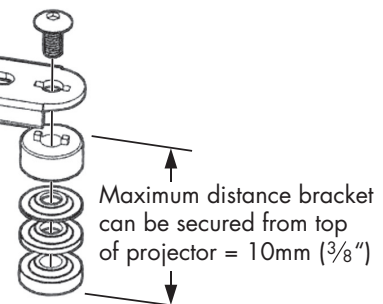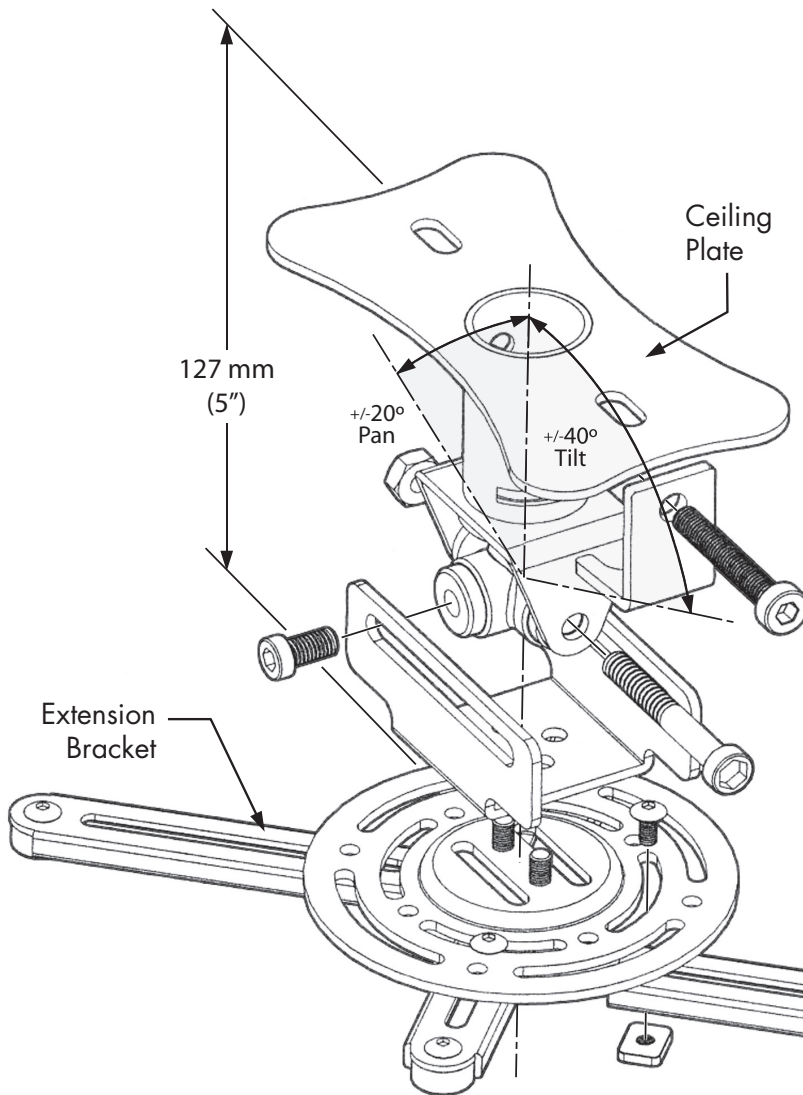

Ceiling Plate footprint  
(not to scale)



the visual display mounting company